

Synthesis of CdTe Nanocrystals Ions by Laser Ablation to Charging Nanobatteries

Akeel M. Kadim  

Medical Physics Department, College of Science, Al Karkh University of Science, Baghdad, Iraq.

Received 02/11/2023, Revised 30/03/2024, Accepted 01/04/2024, Published Online First 20/10/2024



© 2022 The Author(s). Published by College of Science for Women, University of Baghdad.

This is an open-access article distributed under the terms of the [Creative Commons Attribution 4.0 International License](https://creativecommons.org/licenses/by/4.0/), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Abstract

Cadmium telluride (CdTe) nanocrystals (NCs) have generated the interest of researchers as an electrode material in lithium-ion batteries (LIBs) due to a potentially high capacity. CdTe nanocrystals or quantum dots (QDs) were synthesized using laser ablation (Nd: YAG laser at energy 600 mJ by 150 pulse number) to be utilized to form a nanobattery device out of ITO/CdTe/Li: graphene/TPD/Ni. The spectra of the CdTe NCs were assessed using ultraviolet-visible (UV-VIS) and photoluminescence (PL) spectrometers, and the outcomes proved that the CdTe NCs synthesized were nanocrystalline structures. The energy gap (E_g) within CdTe NCs regarded as PL has been identified to be close to 2.33 eV. CdTe NCs produced via laser ablation enhance the functionality of the nanobattery by increasing the carrier's charge mobility and, as a further benefit, by facilitating recombination processes inside CdTe NCs with Li ions. In addition to lighting at (3V), current-voltage (I-V) specifications establish a suitable environment as well as formation. CdTe NCs increased the capability of the nanobattery by increasing the charge mobility of the carrier and, as a result, the interactions between CdTe NCs ions and TPD conductive polymer. Similarly, combining TPD conductive polymers with CdTe NCs semiconductor layers in nanobattery resulted in a complex creation of conductive polymers and semiconductor nanomaterials, resulting in high-performance nanobattery efficiency. The nanobattery mechanism built using materials for semiconductors (CdTe NCs) and (Li-graphene) has successfully run the nanobattery at low voltages while supplying a large current.

Keywords: Cadmium telluride, Laser ablation, Lithium, Nanobattery, Nanocrystals

Introduction

The generation of electrical power from photovoltaic light conversion is increasing all the time. This may be¹⁻² ascribed to the development of novel renewable energy materials and low-cost production systems, which has resulted in a decrease in the cost of a watt-hour generated by photovoltaic means. Using polycrystalline semiconductor thin films is an intriguing technique for lowering the cost of photovoltaic cells¹. The covers of nanobatteries (NBs) are made up of several semiconductor and

conductive organic polymer layers, including the absorber or active material, which will be discussed more below². For many years, researchers have been interested in the cadmium telluride (CdTe) semiconductor, which belongs to the II-VI family. The earliest work on CdTe production and applications extends from the 1890s through the 1920s. CdTe has mostly been investigated in the last ten years as a polycrystalline thin film and as a quantum dot. It has been created as a thin film using

close space vapor transport (CSVT), laser ablation, electrodeposition, and spray pyrolysis, and it has mostly been employed as the absorber material of thin-film photovoltaic³.

Recent CdTe deposition techniques are based on dispersing CdTe nanocrystals in water or organic solvents⁴ and transforming them into CdTe thin films utilizing simple and inexpensive deposition processes such as dip-coating or spin-coating and an annealing procedure. Many approaches have lately been studied to overcome the limitations of CdTe NCs-based cathodes. One technique is to exploit the nanostructure properties of the material to boost the mechanical stability of CdTe NCs and minimize diffusion paths for Li ion transport, thus optimizing cycling efficiency and focusing primarily on lithium-ion diffusion⁵.

Furthermore, once we have arrived at a combination, all of these components should be as large as feasible to build a technique. A standard approach to generate transparent devices, as proved in QDs, graphene, and organic semiconductors, is working to components with low contrast sensitivity and high absorbance⁶. However, nanostructured CdTe with a high surface

Materials and Methods

Initially, 0.8 g of cadmium chloride (CdCl_2) and 0.3 g of sodium telluride (Na_2Te) were dissolved in 40 ml of deionized water (Na_2HTe). The Nd: YAG laser operating at 1064 nm with energy up to 600 mJ/pulse is to be used to synthesis CdTe NCs (see Fig 1). The laser beam is focused (focal length =20cm) on the mixed solution from a lens distance of 5 cm. A container was spinning to generate homogeneous nanocrystals and stirred for 2 hours before passing the nanocrystals solution with an increased pulse number of 150 pulses, allowing the color of the CdTe NCs solution to change to a light green. After that, the CdTe NCs were collected and cleaned five times with deionized water before being completely vacuum packed. The setup of the established nanobattery device used three layers in the following CdTe NCs synthesis. CdTe NCs and Li are now combined within the graphene layer, with N, N'-bis (3-methylphenyl)-N, N'-bis (phenyl) benzidine (TPD) organic polymer provided by Sigma-Aldrich progressively poured upon it. Organic polymeric

area promotes electrolyte side reactions, resulting in irreversible capacity loss during the first cycle. Furthermore, this method is insufficient to increase CdTe high electric conductivity altogether. To further overcome the constraints of the CdTe cathode, nanostructured materials might be blended with a highly conductive and elastic matrix to form a nanocomposite structure⁷.

In the current assignment, a simple sustainable synthesis method for reconstructing homogeneous CdTe nanocrystals by laser ablation deposition with graphene surface on the Li nano battery to fabricate CdTe-Li nanobatteries (CdTe-LiNBs) is used, as well as an investigation of the physical and physicochemical effectiveness of the resulting CdTe-LiNBs is used. The electro layer that adds CdTe NCs to the surface of the Li substrate improves surface area while also providing the best available technology specific-capacity, good cycle-stability, and exceptional efficacy. Because of these properties, CdTe NCs are a great candidate as an emissive material in CdTe-LiNBs. In addition, for enhanced reversible performance of the nano battery in the environment, an environment friendly nano battery is developed.

coating melting 40 mg/ml in ethanol by injection on a glass substrate by aggregation process using covered spinning at 2000 r.p.m. in a round 10 sec for separate covered polymers. To avoid crashes, the first layer was 0.2%wt CdTe NCs in the cover, the second layer was always Li mixed with graphene at a 1:1 ratio, and the third layer was TPD conductive polymer. Immediately after coating in a 40°C oven for 15 minutes, the coating on each cover dries away. TPD and Li blended graphene layers appear to be 30 and 12 nm thick, respectively, while a CdTe NCs cover appears to be 10 nm thick. A nickel (Ni) cathode then gets embedded in the system layer.

Nanobattery processing CdTe-Li nanocrystals covering graphene may create CdTe and Li ions transport rates in nanobatteries in response to a battery life. An electrical generator built of nanostructure material that may produce electrical watts by heading carrier ions to a nanomaterial layer.

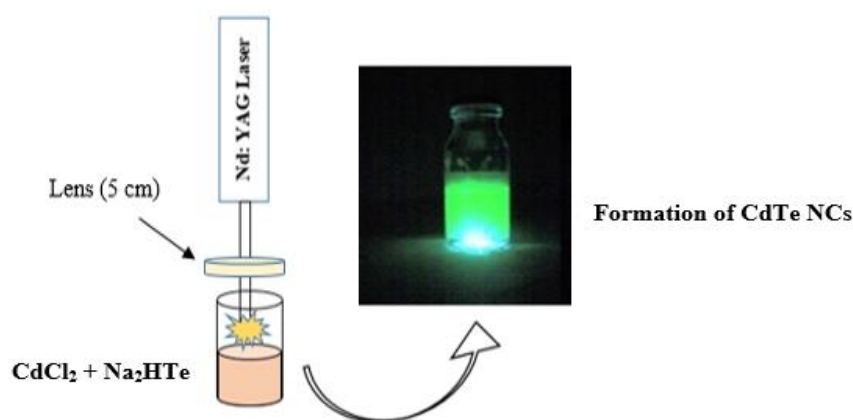


Figure 1. Laser ablation technique of CdTe NCs colloidal formation

Results and Discussion

Figs 2 and 3 illustrate the absorption and photoluminescence spectra of CdTe QDs.

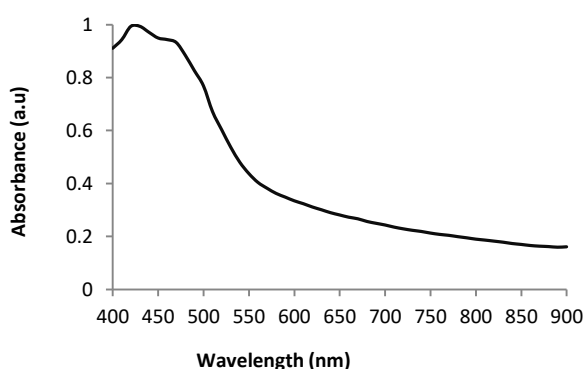


Figure 2. Absorption of CdTe NCs

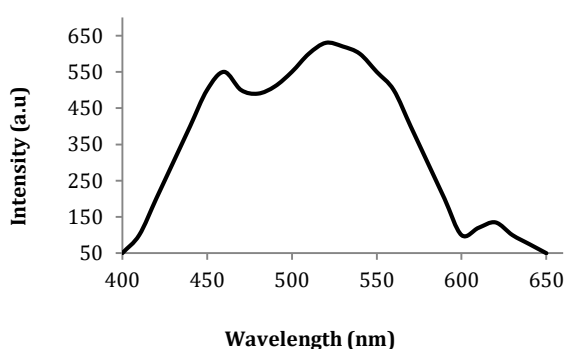


Figure 3. Photoluminescence of CdTe NCs

A UV-VIS band spectrum analyses the absorption of high-level CdTe NCs. These findings have been obtained in an adequate setting when compared to the absorption spectra of previous studies^{8, 9}. Fig 3

exhibits the photoluminescence of CdTe NCs, which suggests that a specific energy band conduction occurs at 530 nm. Excessive fluorescence occurs as a result of the emission of the near-band edge of CdTe NCs, with additional highlights at 460 and 620 nm caused by free excitons recombination. These broad emissions are linked to deep-level leaks, which can be caused by defects in structure. According to that circumstance, the presence of the relevant defect identified as a beyond observer, an emission associated with nanocrystalline defects CdTe NCs might be due to Cd or Te vacant seats^{10,11}. The energy-gap in CdTe NCs must have been established in the photoluminescence formulated at essentially 2.3 eV.

As shown in Fig 4, the crystalline topography of the grown CdTe NCs has been determined in the SEM at 50 Kx magnification. The QDs covering's SEM properties serve as an acceptable notice for the formation of CdTe NCs. The particles produced by SEM have an average size of roughly 10 nm. Fig 4 depicts spherical morphology generated QDs at 100 nm scale.

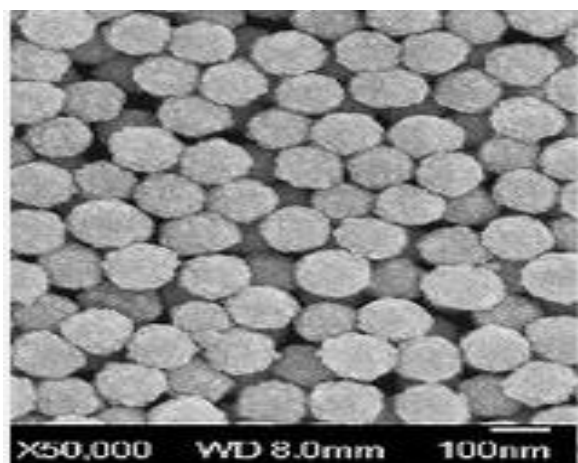


Figure 4. Scanning electron microscope (SEM) of CdTe NCs

Specifies the electrically charged CdTe NCs that perform in Hall Effect orders of magnitude. Thin layers of 10, 20, and 30 nm thickness possess semiconductor activity with n-type conductivity. Table 1 summarizes the Hall Effect.

Table 1. Overview of Cadmium telluride nanocrystals Hall Effect measurements with varying thicknesses

Sample	Thickness (nm)	Conductivity ($\Omega \cdot \text{cm}$)-1	Mobility (cm^2/Vs)	Hall Coefficient (cm^2/C)	Discharge per hour
CdTe	10	2.56	48.5	-1.23×10^8	10^{-5}
	20	1.48	16	-1.27×10^8	10^2
	30	1.34	13.5	-1.31×10^8	10^3

When compared to other CdTe NCs thicknesses, Table I suggested that CdTe NCs varying in thickness checked had strong conductivity of a high thickness (10 nm). The mobility of CdTe NCs of very comparable thickness (10 nm) is greater than that of CdTe NCs of different a thickness (20 and 30 nm), implying that the CdTe are impacted by a decrease in the resistance of the CdTe NCs, which appears to suggest that, amid substantial increases in the QDs, the growth of recombination extremely emerged a CdTe nanobattery device and induced charges, which governed. In light of the improved electron confinement in CdTe NCs, mobility in a carrier increases as dimensions' decrease. This feature separates nanobatteries from commercial batteries, which operate at higher voltages and have lower efficiency. Fig 5 explains the I-V combinations of the CdTe nanobattery device achieved with the ITO/CdTe/Li: graphene/TPD/Ni performance. Fig 5 shows the capacity to rearrange with a general conversion voltage of 3 V voltage bias and a current of just under 0.01-0.44 mA.

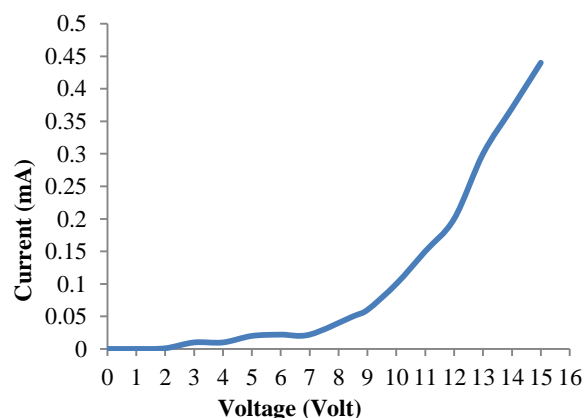


Figure 5. I-V characters of the ITO/CdTe/Li: graphene/TPD/Ni nanobattery device.

A nanobattery consequence of current-voltage demonstrates an overall rise in current produced with a decrease in the size of the depletion-edge layer. Because of the massive growth of the dispersion of ions (CdTe and Li) inside the valence and conduction band, the propagation band barrier will reduce in the forward bias, dramatically increasing the emerging current via the nanobattery^{12,13}. Because the allowable charge and discharge processes altered

dramatically from one cycle to the next, the stream remained stable for the duration of the cycle¹³. The number of charging and discharging cycles that a battery may go through before it stops operating is referred to as its life-cycle. The discharge depth has a significant impact on the life of CdTe NCs batteries. The depths of discharge describe how much of a battery's storage is consumed. Because rechargeable batteries provide lithium ions (Li) to (CdTe NCs) owing to system discharges, recombination would increase the forward bias's current flow^{14, 15}. At this point, these processes emerge as a result of multiple techniques that affect the production of nanobatteries; a carrying The technique is not obviously under the control of another synthesis. Inadequate results impact success, which is also apparent in a band gap the semi-conductors that is running additional devices for providing current^{16, 17}. These devices in the gap charge domain can be classified as imperfections surface imperfections, barrier annealing, output recombination, and boundary configurations¹⁸. Fig 6 illustrates a view of an ITO/CdTe/Li:graphene/TPD/Ni nanobattery, whereas Fig 7 displays the light emitted by this nanobattery component.

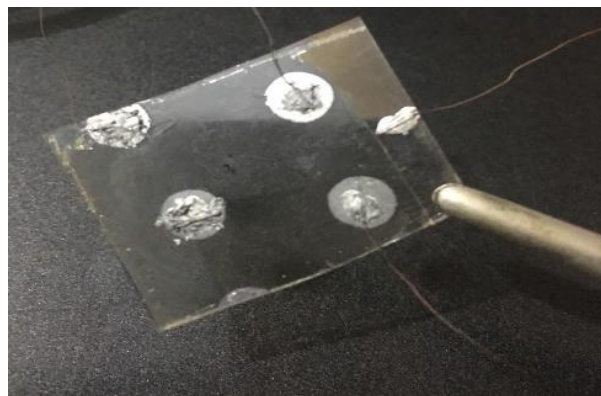


Figure 6. A picture of the ITO/CdTe/Li: graphene/TPD/Ni nanobattery device.



Figure 7. Light illumination produced by ITO/CdTe/Li: graphene/TPD/Ni nanobattery device.

Conclusion

In the decision, the controllable size of CdTe NCs by laser ablation strategy is supported by composition analysis, which has been very beneficial because the crystalline size reduced as the number of laser pulses increased and they had deep imperfections. These imperfections can be constructed in several ways, as well as nano-electronic devices. CdTe NCs raised the ability of the nanobattery by boosting the charge mobility of the carrier and, as a result, the processes of interaction between CdTe NCs ions and TPD organic conductive polymer. likewise, using TPD conductive polymers in nanobattery with CdTe NCs semiconductor layers resulted in a complex formation of conductive polymers and semiconductor nanomaterials, resulting in high-performance nanobattery efficiency. The raised high and current forward can thus explain the suitable

contact between the layers of Li-graphene and CdTe NCs. The current-voltage characteristics are completely matched with the needed voltage, which produces critical features for the functioning of the nanobattery system. A progressive interaction development in the nanobattery device involving CdTe NCs, Li ions, and TPD organic polymers may give forward current flow bias to use confined volts and create positive outcomes for light output. The development of a CdTe nanobattery device utilizing semiconductor materials (CdTe NCs) and (Li) resulted in the nanobattery working with a restricted voltage and a high flow. Nonetheless, research-arranged innovative conductor supplies continue to push the limits in terms of cost, conversion efficiency, extended lifetime, and stability. As new nanomaterials and approaches emerge, nanobatteries

will undoubtedly have a greater impact on our daily lives in the next few years. Furthermore, new nanomaterial preparation processes should be

applied to reduce the cost of nano storage capacity studies.

Authors' Declaration

- Conflicts of Interest: None.
- I hereby confirm that all the Figures and Tables in the manuscript are mine. Furthermore, any Figures and images, that are not mine, have been included with the necessary permission for re-publication, which is attached to the manuscript.
- No animal studies are present in the manuscript.
- No human studies are present in the manuscript.
- Ethical Clearance: The project was approved by the local ethical committee at Al Karkh University of Science.

References

1. Tze-Zhang A, Mohamed S, Mohamad K, Himadry SD, Mohammad AN, Natarajan P. A comprehensive study of renewable energy sources: classifications, challenges and suggestions. *Energy Strategy Rev.* 2022; 43: 1-27. <https://doi.org/10.1016/j.esr.2022.100939>
2. Shubham S, Sudhakara P, Abdoulhdi ABO, Jujhar S, Ilyas RA. Recent trends and developments in conducting polymer nanocomposites for multifunctional applications. *Polymers.* 2021; 13: 2898. <https://doi.org/10.3390/polym13172898>
3. Antonio AP, Jacob AA, Maykel C, José AA, Mauricio OL. Study and application of colloidal systems for obtaining CdTe+Te thin films by spray pyrolysis. *J Anal Appl Pyrolysis.* 2017; 124: 285-289. <https://doi.org/10.1016/j.jaap.2017.01.022>
4. Gu Z, Yang S, Li Z, Sun X, Wang G, Fang Y, et al. An ultrasensitive hydrogen peroxide biosensor based on electrocatalytic synergy of graphene-gold nanocomposite, CdTe-CdS core-shell quantum dots and gold nanoparticles. *Anal Chim Acta.* 2011; 701(1): 75-80. <https://doi.org/10.1016/j.aca.2011.06.015>
5. Tetiana M, Myroslav M, Marian H. Surface-barrier CdTe diodes for photovoltaics. *J Nano- Electron Phys.* 2023; 15(2): 1-5. [https://doi.org/10.21272/jnep.15\(2\).02006](https://doi.org/10.21272/jnep.15(2).02006)
6. Orletskyi IG, Ilashchuk MI, Maistruk EV, Koziarskyi IP, Koziarskyi DP. Electrical properties of the n-NiS₂/n-CdTe isotype heterojunction fabricated by spray pyrolysis. *Acta Phys Pol A.* 2022; 142(5): 561-672.
7. Ghassan Z, Rodolfo D, Nicolás P, Guzay P. Concept development and techno-economic assessment for a solar home system using lithium-ion battery for developing regions to provide electricity for lighting and electronic devices. *Energy Convers Manag.* 2016; 122: 439-448. <https://doi.org/10.1016/j.enconman.2016.05.075>
8. Rakhi G, Ritu S, Kanchan S. Luminescence studies in cadmium telluride nanocrystals grown on glass substrates. *RSC Adv.* 2022; 12: 26596-26602. <https://doi.org/10.1039/D2RA01387H>
9. Volodymyr D, Nazar M, Olga K, Oleksandr S, Anatolii K, Oleg AY, et al. Core and Shell Contributions to the Phonon Spectra of CdTe/CdS Quantum Dots. *Nanomater.* 2023; 13: 921. <https://doi.org/10.3390/nano13050921>
10. Guillermo Q, Hugo S. Jesus R. Characterization of CdTe thin films using orthogonal double-pulse laser-induced breakdown spectroscopy. *Chemosensors.* 2023; 11(4): 1-14. <https://doi.org/10.3390/chemosensors11010004>
11. Meng-Yao S, Xin-Yuan L, Jia-Tao Z. Telluride semiconductor nanocrystals: progress on their liquid-phase synthesis and applications. *Rare Metals.* 2022; 41: 2527-2551. <https://link.springer.com/article/10.1007/s12598-022-01980-9>
12. Niranjan S, Joseph S. Model predictive control of cadmium telluride (CdTe) quantum dot (QD) crystallization. *Am Control Conf. IEEE Xplore.* San Diego, CA, USA, 31 May - 02 June 2023. <https://ieeexplore.ieee.org/document/10156018>
13. Fehmi GU, Adisa A. Environmental impacts of small-scale hybrid energy systems: Coupling solar photovoltaics and lithium-ion batteries. *Sci Total Environ.* 2018; 643: 1579-1589. <https://doi.org/10.1016/j.scitotenv.2018.06.290>
14. Xiutao Y, Chuiyu L, Jiayi W, Biao Z, Sen L, Shenghui X, et al. Investigation of the surface and interfacial properties of polycrystalline CdTe/monocrystalline Si structure. *J Electron Mater.* 2022; 51: 4378-4387.

- <https://link.springer.com/article/10.1007/s11664-022-09682-9>
15. Simon MJ., Brian AM. Battery and energy metals: future drivers of the minerals industry. *SEG Discov.* 2021; 127: 11-18. <https://doi.org/10.5382/2021-127.fea-01>
16. Yiqiu X, Ling X, Jiwei H, Caifang L, Jimei Q, Yu H, et al. Advances in the applications of graphene-based nanocomposites in clean energy materials. *Crystals.* 2021; 11(47): 1-26. <https://doi.org/10.3390/cryst11010047>
17. Yue Z, Wei L, Peter Z, Mohammad HAS, Dan M, Donald JF, et al. A durable lithium–tellurium battery: Effects of carbon pore structure and tellurium content. *Carbon.* 2021; 173: 11-21. <https://doi.org/10.1016/j.carbon.2020.10.085>
18. Anna L, Márton V, Wesley MD, Jens N, Oleg P, Richard DS, et al. Photo-accelerated fast charging of lithium-ion batteries. *Nat Commun.* 2019; 10: 1-7. <https://www.nature.com/articles/s41467-019-12863-6>

تخليق أيونات تيلورايد الكادميوم بلورات نانوية عن طريق الاحتثات بالليزر لشحن البطاريات النانوية

عقيل مهدي كاظم

قسم الفيزياء الطبية، كلية العلوم، جامعة الكرخ للعلوم، بغداد، العراق.

الخلاصة

أثارت بلورات تيلورايد الكادميوم النانوية اهتمام الباحثين كمادة قطب كهربائي في بطاريات الليثيوم أيون بسبب قدرتها وتحملها العالي. تم تصنيع بلورات تيلورايد الكادميوم النانوية أو النقاط الكمومية باستخدام الاحتثات بالليزر (ليزر ندوميوم-ياك عند طاقة 600 مللي جول $\times 150$ عدد نبضات) لاستخدامها لتشكيل جهاز بطارية نانوية من CdTe / Ni / الجرافين /ITO/TPD/Li: تم تقييم أطيايف بلورات تيلورايد الكادميوم النانوية باستخدام مطياف الأشعة فوق البنفسجية المرئية والتألق الضوئي، وأثبتت النتائج أن بلورات تيلورايد الكادميوم النانوية المركبة كانت هياكل بلورية نانوية. تم تحديد فجوة الطاقة داخل بلورات تيلورايد الكادميوم النانوية التي يعبر عنها التألق الضوئي لتكون قريبة من 2.33 إلكترون فولت. تعمل بلورات تيلورايد الكادميوم النانوية المنتجة عن طريق الاحتثات بالليزر على تحسين وظائف بطارية النانو عن طريق زيادة حركة شحن الناقل، وكميزة إضافية، من خلال تسهيل عمليات إعادة الاتحاد داخل بلورات تيلورايد الكادميوم النانوية مع أيونات الليثيوم. بالإضافة إلى ان الإضاءة حدثت عند (3 فولت)، فإن مواصفات الجهد والتيار تخلق بيئة مناسبة في التكوين. زادت CdTe NCs من قدرة البطارية النانوية عن طريق زيادة حركة الشحن للحامل، ونتيجة لذلك، التفاعلات بين أيونات CdTe NCs والبوليمر الموصل TPD. وبالمثل، أدى الجمع بين البوليمرات الموصل TPD مع طبقات أشباه الموصلات CdTe NCs في البطاريات النانوية إلى إنشاء معقد لبوليمرات موصل ومواد نانوية لأشباه الموصلات، مما أدى إلى كفاءة بطارية نانوية عالية الأداء. نجحت آلية البطارية النانوية التي تم بناؤها باستخدام مواد لأشباه الموصلات (بلورات تيلورايد الكادميوم النانوية) و (الليثيوم-كرافين) في تشغيل بطارية النانو بجهد منخفض مع توفير تيار كبير.

الكلمات المفتاحية: تيلورايد الكادميوم، الاحتثات بالليزر، الليثيوم، بطارية نانوية، بلورات نانوية